Your sample fits, too!

Stages


High-speed bond testing maximizes your units per hour (UPH). The standard Sigma* comes with a high axis speed of 50 mm/s, direct-drive motor, and mapped linear positional encoders to ensure very accurate positioning.

*Floor-based Sigmas come with high speed axis of 500 mm/s and 10 nm encoders.

Work holders

Accurate alignment Secure lock maintains reproducible positioning

Quick release Exchanging workholders is a very fast procedure

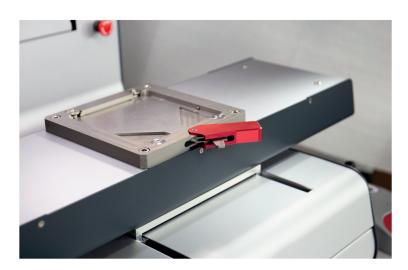



Besides customization, we have a wide selection work holders available.



